


# CONNECTOR ROADWAY SECTION

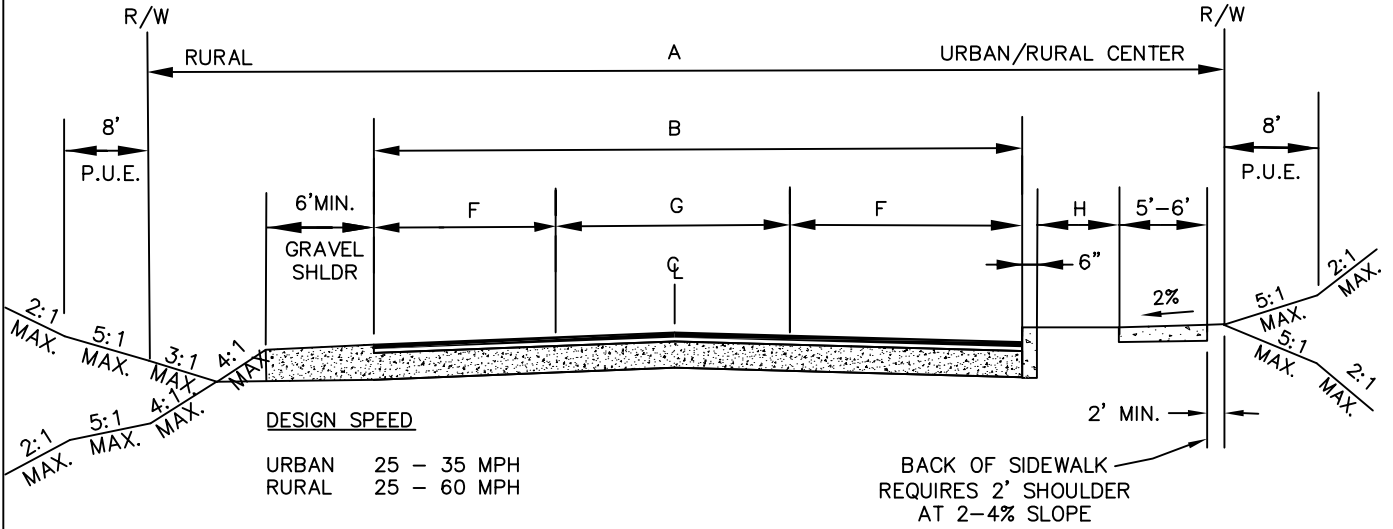

## MINIMUM REQUIREMENTS

ROAD TYPE	MINIMUM RIGHT-OF-WAY (FT)	PAVED WIDTH (FT)	NO. OF LANES	TRAVEL LANE (FT)	CENTER TURN LANE (FT)	TRAVEL LANE (FT)	PARKING LANE	SIDE-WALK (FT)	LANDSCAPE STRIP (FT)
	A	B	C	F	G	F			H
URBAN/RURAL CENTER	55	28-34	2	14-17	0	14-17	ONE SIDE	5-6	5
RURAL	55	22	2	11	0	11	NONE	NONE	NONE
COMMERCIAL/MULTIFAMILY	60	32-34	2	16-17	0	16-17	BOTH SIDES	5-7	5
INDUSTRIAL	60	42	2	21	0	21	BOTH SIDES	5	5

## NOTES

1. SEE DRAWING C100 FOR DETAILS ON THE STRUCTURAL SECTION.
2. MAXIMUM GRADE = 15%. COMMERCIAL/MULTIFAMILY/INDUSTRIAL MAXIMUM GRADE = 8%.
3. CROSS SLOPE = 2-4% (INCLUDING SHOULDER).
4. SLOPES SHALL BE RECOVERABLE WITHIN THE CLEAR ZONE PER SECTION 245.
5. GRAVEL SHOULDERS AND DITCHES ARE ALLOWED FOR RURAL AREAS ONLY.
6. AN 8 FOOT WIDE PUBLIC UTILITY EASEMENT (P.U.E.) IS REQUIRED IN ADDITION TO RIGHT-OF-WAY.
7. SEE ZDO SECTION 1007 FOR SIDEWALK WIDTH REQUIREMENTS. IN LOCATIONS WHERE CURB AND SIDEWALK ARE NOT REQUIRED, A GRAVEL SHOULDER SHALL BE PROVIDED.
8. THIS STANDARD SECTION SHALL APPLY EXCEPT WHERE COMPREHENSIVE PLAN REQUIREMENTS SPECIFY A DIFFERING SECTION.
9. PARKING MAY BE REQUIRED ON BOTH SIDES OF URBAN/RURAL CENTER CONNECTOR ROADWAYS. ADDITIONAL PAVED WIDTH AND R/W WILL BE REQUIRED.

S:\Engineering\Roadway Standards\2010 Roadway Standards\2010 Standards for Publish\Drawings\DWGs\ C100-D700.dwg

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT	APPROVAL DATE: 1/1/10	SCALE: N.T.S.	STANDARD DRAWING
			150 BEAVERCREEK ROAD OREGON CITY, OR 97045	<b>CONNECTOR ROADWAY SECTION</b>		<b>C120</b>
			